
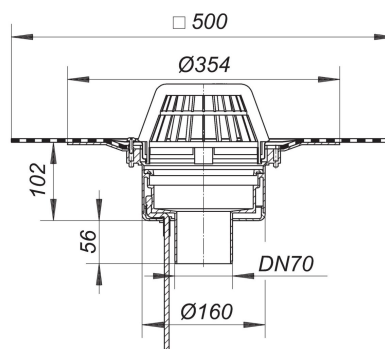


21. October 2019

DALLMER

roof drain type 62 H DallBit, heated, DN 70

Product No. **622143**
 EAN: 4001636622143
 Discount group: 10

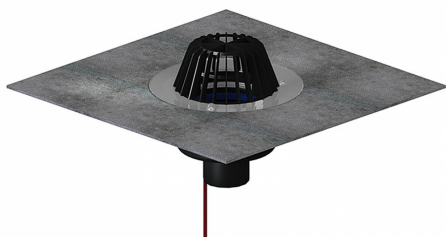

conforming to DIN EN 1253
 with factory-fitted collar of 5.0 mm modified bitumen membrane, 500 x 500 mm, welded to the flange and clamped with a stainless steel clamp ring

specification:

- insulated drain body
- outlet vertical
- domed grate

material:

polypropylene, UV-stabilized

H = roof drain heated version

Connect to 230 V supply, conforming to VDE 0721, Part 1/3.78

Power per drain: 15 watts

Current per drain: 0.06 amps

Suggested current per roof area: 16 amps

Product No.	Description	Dimensions
500328	balcony grating GES 15, 200 x 200 mm	200 x 200 mm
500311	balcony grating SEN 15, 150 x 150 mm	150 x 150 mm
500304	balcony grating SES 15, 150 x 150 mm	150 x 150 mm
620996	domed grating/gravel guard S 15, d: 170 mm	d: 170 mm
620934	domed grating/gravel guard type S 15. stainless steel, d: 150 mm	
515056	fire + sound-insulating collar installation kit 5, DN 70/DN 100	DN 70/DN 100
515131	fire protection kit 8 for steel trapezoidal-profiled roof, DN 70	

21. October 2019

DALLMER

590183	flat grate S 15, d: 170 mm	d: 170 mm
671394	overflow adaptor 86.1	
590121	perforated collar/gravel guard S 15, d: 170 mm	d: 170 mm
620958	planter drain box, 362 x 362 mm	362 x 362 mm
621580	raising piece type 630 clamp ring	
622587	raising piece type 630 DallBit	
671226	raising piece type 630 FPO-PP	
623584	raising piece type 630 PVC	