
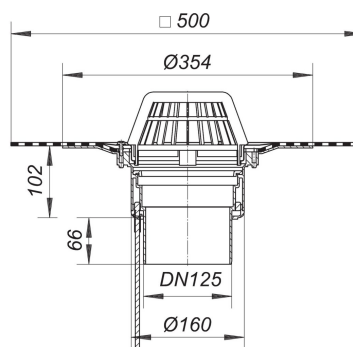


21. October 2019

DALLMER

roof drain type 62 H DallBit, heated, DN 125

Product No. **622181**
 EAN: 4001636622181
 Discount group: 10

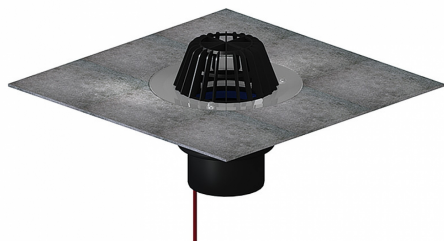

conforming to DIN EN 1253
 with factory-fitted collar of 5.0 mm modified bitumen membrane, 500 x 500 mm, welded to the flange and clamped with a stainless steel clamp ring

specification:

- insulated drain body
- outlet vertical
- domed grate

material:

polypropylene, UV-stabilized

H = roof drain heated version

Connect to 230 V supply, conforming to VDE 0721, Part 1/3.78

Power per drain: 15 watts

Current per drain: 0.06 amps

Suggested current per roof area: 16 amps

| Product No. | Description | Dimensions |
|-------------|--|--------------|
| 500328 | balcony grating GES 15, 200 x 200 mm | 200 x 200 mm |
| 500311 | balcony grating SEN 15, 150 x 150 mm | 150 x 150 mm |
| 500304 | balcony grating SES 15, 150 x 150 mm | 150 x 150 mm |
| 620996 | domed grating/gravel guard S 15, d: 170 mm | d: 170 mm |
| 620934 | domed grating/gravel guard type S 15. stainless steel, d: 150 mm | |
| 590183 | flat grate S 15, d: 170 mm | d: 170 mm |
| 671394 | overflow adaptor 86.1 | |

21. October 2019

DALLMER

| | | |
|--------|--|--------------|
| 590121 | perforated collar/gravel guard S 15, d: 170 mm | d: 170 mm |
| 620958 | planter drain box, 362 x 362 mm | 362 x 362 mm |
| 621580 | raising piece type 630 clamp ring | |
| 622587 | raising piece type 630 DallBit | |
| 671226 | raising piece type 630 FPO-PP | |
| 623584 | raising piece type 630 PVC | |